


Non-Return Valves (Check Valves)

TRUDESIGN Non-Return Valves (Check Valves) are used in-line to prevent water backflow or siphoning and are available in 6 sizes (in-line) and two sizes (threaded) in BSP or NPS.

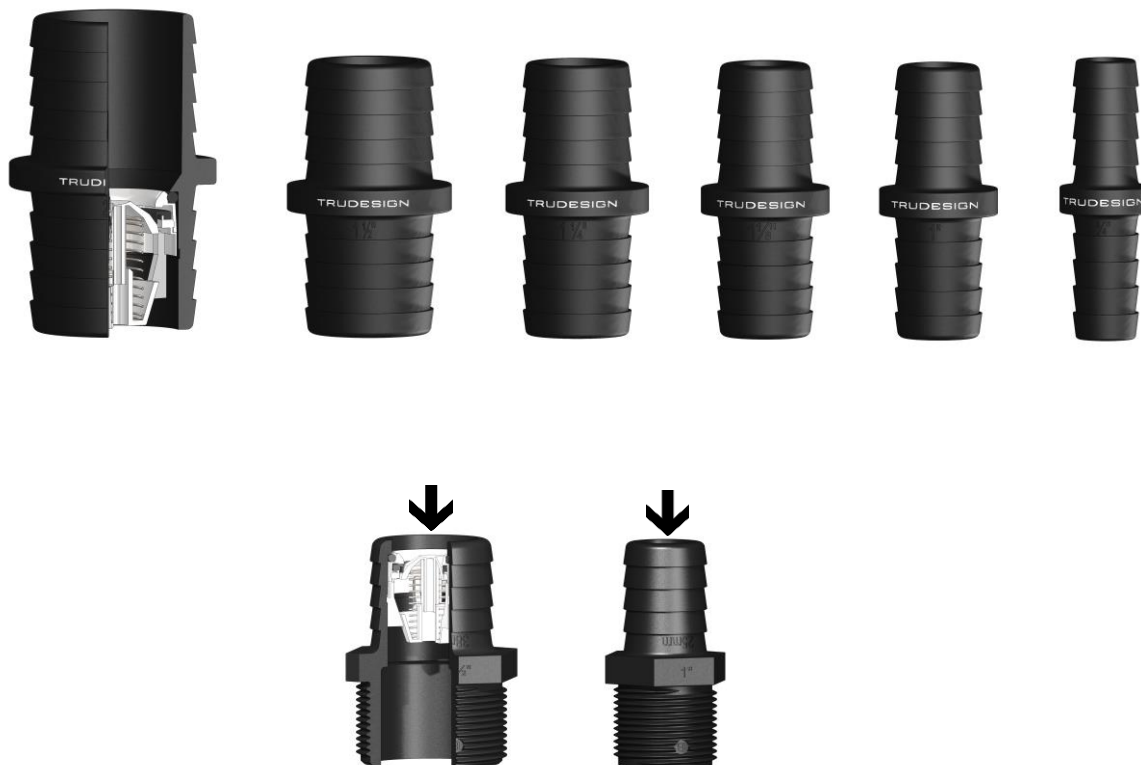

Part Numbers:

Model / Size	Part Number	Part Number PKG
Non-Return Valve ¾"	90804	90845
Non-Return Valve 1"	90805	90846
Non-Return Valve 1 ⅛"	90950	90951
Non-Return Valve 1 ¼"	90806	90847
Non-Return Valve 1 ½"	90807	90848
Non-Return Valve 2"	90812	90849
Model / Size	Part Number	Part Number PKG
Non-Return Valve Tail 25mm 1" BSP	90990	91037
Non-Return Valve Tail 38mm 1½" BSP	90980	91039
Check Valve - 1" Barb, 1" NPS	91291	91292
Check Valve - 1½" Barb, 1½" NPS	91293	91294

Key Features:

Feature:	Benefit:
Manufactured from a composite UV stabilized, glass-reinforced Nylon 6	High strength, tough and light weight. Can be used in direct sunlight.
High impact and tensile strength	“Water hammer safe” and insensitive to pressure shocks in the pipeline
Stainless steel spring	No corrosion issues or risk of internal valve staying open
Low ‘cracking’ (opening) pressure	Minimal pressure required to open the valve with minimal restriction on flow-rates
In line fitting	Minimal installation room needed, and no other fittings required
Printed white arrow (opposite logo side)	Quick and easy identification of water flow direction

Specifications:

Size:	¾" (19mm)	1" (25mm)	1 ¼" (28mm)	1 ½" (32mm)	1 ¾" (38mm)	2" (50mm)
Weight	21 g (0.7 oz)	34 g (1.2 oz)	46 g (1.6 oz)	50 g (1.8 oz)	67 g (2.4 oz)	119 g (4.2 oz)
Temp. Service	65°C	65°C	65°C	65°C	65°C	65°C
Temp. Max	93°C	93°C	93°C	93°C	93°C	93°C
Pressure Max	50 psi	50 psi	50 psi	50 psi	50 psi	50 psi
Cracking Pressure	~ 0.41 psi	~ 0.29 psi	~ 0.29 psi	~ 0.26 psi	~ 0.23 psi	~ 0.22 psi
Recommended for flow-rates between	15 – 42 Litr/min (4 – 11 gpm)	25 – 79 Litre/min (6.5–21 gpm)	25 – 79 Litre/min (6.5 – 21 gpm)	32 – 117 Litre/min (8.5 – 31 gpm)	61 – 193 Litre/min (16 – 51 gpm)	87 – 322 Litre/min (23 – 85 gpm)
Pressure loss @ max flow-rate	3.8 psi (262 mbar)	3.8 psi (262 mbar)	3.8 psi (262 mbar)	2.8 psi (193 mbar)	2.3 psi (159 mbar)	2.9 psi (200 mbar)

Installation:

- Ensure the Non-Return Valve (Check Valve) is installed with the water flowing in the same direction as the white arrow.
- Use 2 hose clamps on each end (4 total), ensuring not to over-tighten.
- It is recommended for dirty water situations that the valve be cleaned once per annum to dislodge debris.

The information contained in this information sheet is for general information purposes only. The information is provided by TruDesign™ and while we endeavour to keep the information up to date and correct, we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability. Any reliance you place on such information is therefore strictly at your own risk.